

ROYAL-SMCA-AD3C



Wattage: 22W | 27W


PRODUCT HIGHLIGHTS

- Aesthetically designed compact power track mounted-accent luminaire
- Specially engineered 355° rotatable luminaire and 45°-90° adjustable light head
- The complete luminaire is made of die-cast aluminium
- High efficient passive cooling die-cast aluminium light head with rotatable arm
- Aesthetically designed anti glare ABS front ring
- High efficiency vacuum metalized polycarbonate reflector with beam angle options of 12°, 24°, 40° & 60°
- High efficacy chip on board (COB) LED technology
- Adaptor based inbuilt high efficiency electronic driver technology
- Adaptor-suitable for 3 wire / 4 wire power track
- Shade : powder coated-white, black & grey

3 CKT

LED PARAMETERS

WATTS	CRI	COLOR TEMP.	LUMEN	CRI	COLOR TEMP.	LUMEN
22W	90	3000 K, 3500 K, 4000 K	2289 lm, 2303 lm, 2369 lm	80	5700 K	2654 lm
27W		3000 K, 3500 K, 4000 K	2634 lm, 2664 lm, 2722 lm		5700 K	3055 lm



Application area for retail space:
Focal area | Ambient | Show Window | Wall Display

ROYAL-SMCA-AD4C

GARDLER®




Wattage: 18W | 20W | 22W | 24W | 27W

Power Track-ACCENT LIGHT

TECHNICAL SPECIFICATIONS

Light Source	: COB-Chip on Board
Power Consumption	: 18W, 20W, 22W, 24W, 27W
90 CRI	: 3000 K 3500 K 4000 K
80 CRI	: 5700 K
Driver	: Constant current AC-DC
Input Voltage Range	: 220-240 V
Output Voltage	: 33V-37V DC
Output Current	: 500 mA, 550 mA, 600 mA, 650 mA, 700 mA,
Power Factor	: >0.95
THD	: <15%

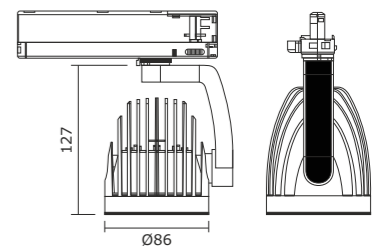

All dimensions are in mm

4 CKT

WATTS	CRI	COLOR TEMP.	LUMEN	CRI	COLOR TEMP.	LUMEN
18W	90	3000 K, 3500 K, 4000 K	1957 lm, 2010 lm, 2017 lm	80	5700 K	2276 lm
20W		3000 K, 3500 K, 4000 K	1989 lm, 2060 lm, 2101 lm		5700 K	2346 lm
22W		3000 K, 3500 K, 4000 K	2289 lm, 2303 lm, 2369 lm		5700 K	2654 lm
24W		3000 K, 3500 K, 4000 K	2442 lm, 2513 lm, 2562 lm		5700 K	2806 lm
27W		3000 K, 3500 K, 4000 K	2634 lm, 2664 lm, 2722 lm		5700 K	3055 lm