



• Pendant mount - Down light

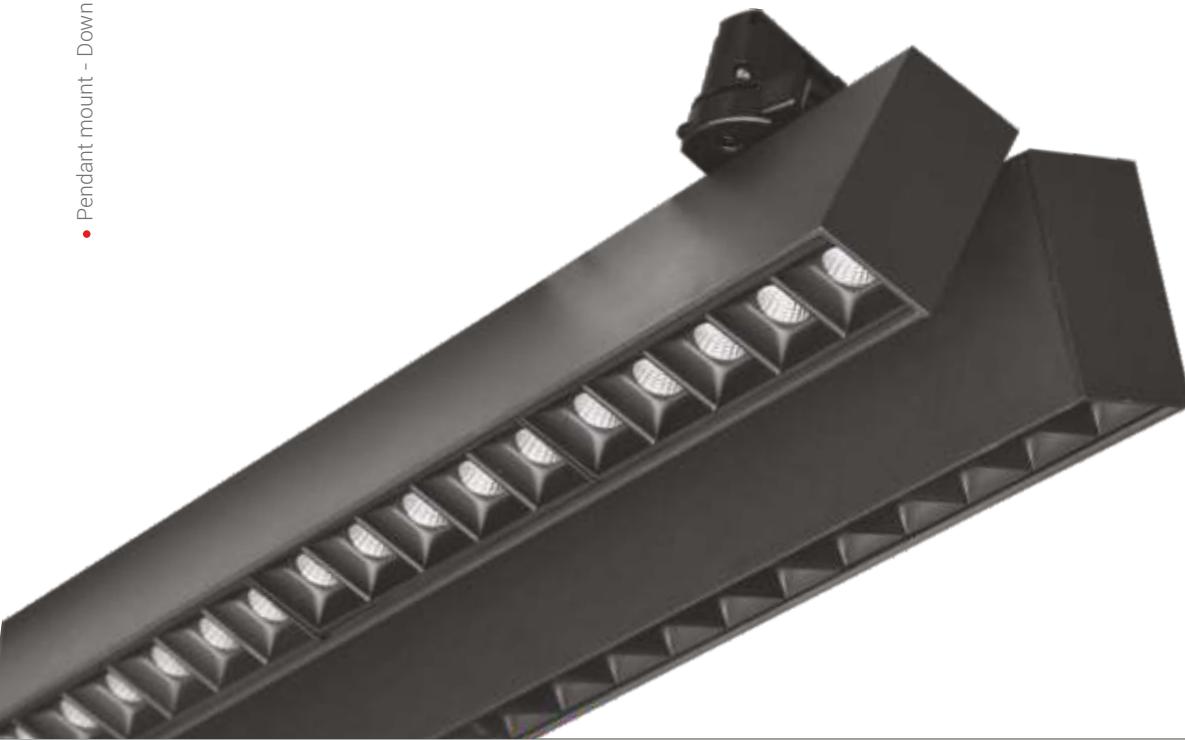

80 CRI

PRODUCT HIGHLIGHTS

- Aesthetically designed linear profile power track twin luminaire for down & wall washing application
- Luminaire housing made from high-grade extruded aluminum
- High efficiency passive cooling technology for good thermal management
- Anti-glare reflector optics with option of beam angle-15°,30°,45°
- High efficacy SMD (High Power) LED integrated with highly efficient metal core PCB for higher thermal conductivity
- Inbuilt-high efficiency electronic driver technology
- Adaptor-suitable for 4 wire power track
- Shade : powder coated-white, black & grey



TECHNICAL SPECIFICATIONS

Light Source	: COB
Power Consumption	: 2x25w
Color Temperature	: 3000 K 4000 K 6000 K
Lumens	: 5730 lm
Driver	: Constant current AC - DC
Input voltage range	: 100 - 277 V
Output voltage	: 24V - 36V DC
Output Current	: 1050 mA 1200 mA
Power Factor	: >0.98
THD	: <10%

All dimensions are in mm

Product Application :
Retail Space | Hyper / Supermarket