


• Power Track-Diffused light

80 CRI


## FEATURE

- Aesthetically designed track mount linear profile luminaire for down light application
- Luminaire housing made from high-grade extruded aluminum
- High efficiency passive cooling technology for good thermal management
- Aesthetically designed high efficiency PC symmetric diffuser
- High efficacy SMD (mid powder) LED technology used in FR-4 PCB
- Inbuilt-high efficiency electronic driver technology
- Adaptor-suitable for 3 wire & 4 wire power track
- Shade : powder coated-white, black & grey



## TECHNICAL SPECIFICATION

Light Source	: MPL- Mid Power LED
Power Consumption	: 24W, 29W
Color Temperature	: 3000 K   3500 K   4000 K   5700 K   6500 K
Lumens	24W : 2116 lm, 2160 lm, 2246 lm, 2288 lm, 2418 lm 29W : 2673 lm, 2735 lm, 2851 lm, 2917 lm, 3029 lm
Driver	: Constant Current AC - DC
Input Voltage Range	: 220 V - 240 V AC
Output Voltage	: 34 V - 37 V DC
Output Current	: 650 mA, 750 mA
Power Factor	: >0.95
THD	: <10%

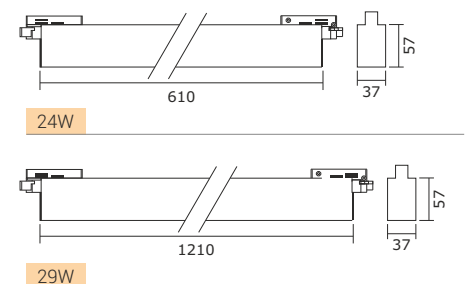

All dimensions are in mm

Product Application :  
Retail Space | Ambient | Cash Counter | Staircase