


# LIZZY-P-DOT

GARDLER®

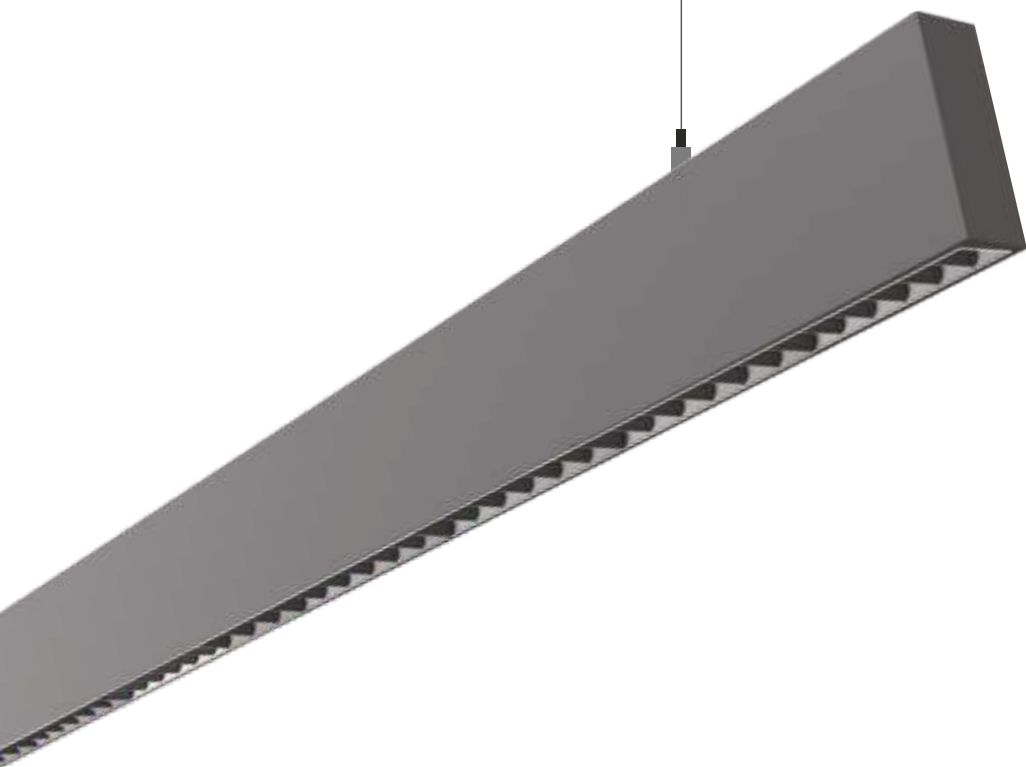

Pendant -DOWN LIGHT



Wattage: 36W | 50W

## TECHNICAL SPECIFICATIONS

Light Source	: HPL-High Power LED
Power Consumption	: 36W, 50W
90 CRI	: 3000 K   3500 K   4000 K
80 CRI	: 5700 K   6500 K
Driver	: Constant Current AC-DC
Input Voltage Range	: 220-240 V
Output Voltage	: 33V-37V DC
Output Current	: 1050 mA, 1200 mA
Power Factor	: >0.95
THD	: <10%

## PRODUCT HIGHLIGHTS

- Aesthetically designed surface & pendant mount linear profile luminaire for down light application
- Luminaire housing made from high-grade extruded aluminum
- High efficiency passive cooling technology for good thermal management
- Aesthetically designed high efficiency PC symmetric diffuser
- High efficacy SMD (mid powder) LED technology used in FR-4 PCB
- Inbuilt-high efficiency electronic driver technology
- Shade : powder coated-white, black & grey



## LED PARAMETERS

WATTS	CRI	COLOR TEMP.	LUMEN
36W	80	3000 K, 3500 K, 4000 K, 5700 K, 6500 K	3312 lm, 3384 lm, 3456 lm, 3564 lm, 3672 lm
50W		3000 K, 3500 K, 4000 K, 5700 K, 6500 K	4550 lm, 4650 lm, 4750 lm, 4900 lm, 5050 lm

Color choice



Application area for retail space:  
Ambient | Entrance | Cash Counter | Hyper/Supermarket