



IS 10322(PART 5/SEC 2):2012  
R-71012963


Wattage: 22W | 24W | 27W | 29W | 31W | 35W

### PRODUCT HIGHLIGHTS


- Aesthetically designed high performance recess-adjustable wall washer luminaire
- The complete luminaire is made of die cast aluminium
- High efficient passive cooling die-cast aluminium light head
- The light head rotatable 350° and adjustable 45°
- Aesthetically designed anti glare ABS front ring
- High efficiency vacuum metalized polycarbonate reflector with beam angle options of 12°, 24°, 45° & 60°
- High efficacy chip on board (COB) LED technology
- Isolated - high efficiency electronic driver technology
- Heavy gauge spring toggle for easy installation on false ceiling application
- Shade: powder coated-white, black & grey

### LED PARAMETERS

WATTS	CRI	COLOR TEMP.	LUMEN	CRI	COLOR TEMP.	LUMEN
22W	90	3000 K, 3500 K, 4000 K	2214 lm, 2334 lm, 2369 lm	80	5700 K	2551 lm
24W		3000 K, 3500 K, 4000 K	2391 lm, 2513 lm, 2562 lm		5700 K	2756 lm
27W		3000 K, 3500 K, 4000 K	2686 lm, 2783 lm, 2789 lm		5700 K	2979 lm
29W		3000 K, 3500 K, 4000 K	2887 lm, 2934 lm, 3045 lm		5700 K	3192 lm
31W		3000 K, 3500 K, 4000 K	3037 lm, 3084 lm, 3144 lm		5700 K	3385 lm
35W		3000 K, 3500 K, 4000 K	3412 lm, 3474 lm, 3528 lm		5700 K	3794 lm

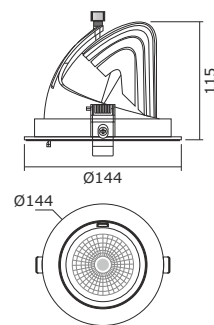

⌚ Cut Dia. Ø135 mm



# CLORIS

# GARDLER®



IS 10322(PART 5/SEC 2):2012  
R-71012963



Recess-ADJUSTABLE SPOT LIGHT

Wattage: 37W | 40W

### TECHNICAL SPECIFICATIONS

Light Source : COB-Chip on Board  
Power Consumption : 22W, 24W, 27W, 29W, 31W, 35W, 37W, 40W


90 CRI : 3000 K | 3500 K | 4000 K  
80 CRI : 5700 K

Driver : Constant Current AC-DC  
Input Voltage Range : 220-240 V  
Output Voltage : 33V-37V DC  
Output Current : 600 mA, 650 mA, 700 mA, 750 mA, 800 mA, 900 mA, 950 mA, 1050 mA

Power Factor : >0.98  
THD : <10%

### LED PARAMETERS

WATTS	CRI	COLOR TEMP.	LUMEN	CRI	COLOR TEMP.	LUMEN
37W	90	3000 K, 3500 K, 4000 K	3634 lm, 3725 lm, 3760 lm	80	5700 K	4098 lm
40W		3000 K, 3500 K, 4000 K	3969 lm, 4020 lm, 4093 lm		5700 K	4323 lm

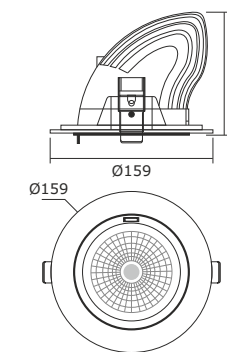

⌚ Cut Dia. Ø149 mm

Color choice:  Black  Grey  White

Driver options:  90 CRI  80 CRI  IP20  COB  DALI Tunable  BIG 0.960  SSM 0.768

Application area for retail space:  
Focal area | Peripheral | Show Window | Wall Display

All dimensions are in mm

All dimensions are in mm