

ROCH-AD-3C



Wattage: 35W | 39W


PRODUCT HIGHLIGHTS

- Aesthetically designed cylindrical power track mounted-accent luminaire
- Specially engineered 355° rotatable luminaire and 45°-90° adjustable light head
- The complete luminaire is made of extruded aluminium
- High efficient passive cooling extruded aluminium light head
- Aesthetically designed anti glare ABS front ring
- High efficiency vacuum metalized polycarbonate reflector with beam angle options of 12°, 24°, 45° & 60°
- High efficacy chip on board (COB) LED technology
- Adaptor based inbuilt high efficiency electronic driver technology
- Adaptor-suitable for 3 wire / 4 wire power track
- Shade : powder coated-white, black & grey

3 CKT

LED PARAMETERS

WATTS	CRI	COLOR TEMP.	LUMEN	CRI	COLOR TEMP.	LUMEN
27W	90	3000 K, 3500 K, 4000 K	2549 lm, 2598 lm, 2681 lm	80	5700 K	2923 lm
31W		3000 K, 3500 K, 4000 K	2919 lm, 3014 lm, 3134 lm		5700 K	3264 lm
35W		3000 K, 3500 K, 4000 K	3159 lm, 3289 lm, 3301 lm		5700 K	3535 lm
38W		3000 K, 3500 K, 4000 K	3428 lm, 3487 lm, 3602 lm		5700 K	3812 lm



Application area for retail space:
Focal area | Ambient | Show Window | Wall Display

ROCH-AD-4C

GARDLER®



Wattage : 35W | 37W | 39W | 40W

Power Track-ACCENT LIGHT



TECHNICAL SPECIFICATIONS

Light Source	: COB-Chip on Board
Power Consumption	: 35W, 37W, 39W, 40W
90 CRI	: 3000 K 3500 K 4000 K
80 CRI	: 5700 K
Driver	: Constant current AC-DC
Input Voltage Range	: 220-240 V
Output Voltage	: 33V-37V DC
Output Current	: 900 mA, 950 mA, 1000 mA, 1050 mA
Power Factor	: >0.95
THD	: <15%

4 CKT

LED PARAMETERS

WATTS	CRI	COLOR TEMP.	LUMEN	CRI	COLOR TEMP.	LUMEN
35W	90	3000 K, 3500 K, 4000 K	3159 lm, 3289 lm, 3301 lm	80	5700 K	3535 lm
37W		3000 K, 3500 K, 4000 K	3394 lm, 3467 lm, 3540 lm		5700 K	3796 lm
38W		3000 K, 3500 K, 4000 K	3428 lm, 3487 lm, 3602 lm		5700 K	3812 lm
40W		3000 K, 3500 K, 4000 K	3753 lm, 3835 lm, 3916 lm		5700 K	4116 lm

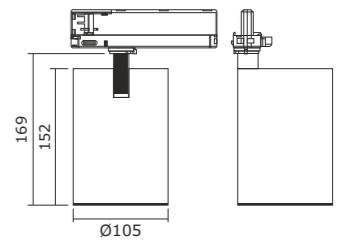

All dimensions are in mm