

Pendant -DOWN LIGHT

Wattage: 22W | 25W | 27W | 29W | 32W | 36W | 38W | 40W

TECHNICAL SPECIFICATIONS


Light Source	: MPL-Mid Power LED
Power Consumption	: 22W, 25W, 27W, 29W, 32W, 36W, 38W, 40W
90 CRI	: 3000 K 3500 K 4000 K
80 CRI	: 5700 K 6500 K
Driver	: Constant Current AC-DC
Input Voltage Range	: 220-240 V
Output Voltage	: 33V-37V DC
Output Current	: 600 mA, 650 mA, 700 mA, 750 mA, 850 mA, 900 mA, 950 mA, 1000 mA
Power Factor	: >0.98
THD	: <10%

PRODUCT HIGHLIGHTS

- Aesthetically designed linear profile pendant with accent spot light luminaire for up down light application
- Luminaire housing made from high-grade extruded aluminum
- High efficiency passive cooling technology for good thermal management
- Aesthetically designed high efficiency PC symmetric diffuser
- High efficacy SMD (mid powder) LED technology used in FR-4 PCB
- Inbuilt-high efficiency electronic driver technology
- Pendant installation with wire suspender and ceiling coupler
- Shade : powder coated-black, white & grey


LED PARAMETERS

WATTS	CRI	COLOR TEMP.	LUMEN
22W	80	3000 K, 3500 K, 4000 K, 5700 K, 6500 K	2268 lm, 2310 lm, 2352 lm, 2394 lm, 2436 lm
25W		3000 K, 3500 K, 4000 K, 5700 K, 6500 K	2436 lm, 2478 lm, 2520 lm, 2562 lm, 2604 lm
27W		3000 K, 3500 K, 4000 K, 5700 K, 6500 K	2688 lm, 2730 lm, 2772 lm, 2814 lm, 2856 lm
29W		3000 K, 3500 K, 4000 K, 5700 K, 6500 K	2772 lm, 2856 lm, 2940 lm, 3024 lm, 3108 lm
32W		3000 K, 3500 K, 4000 K, 5700 K, 6500 K	3092 lm, 3134 lm, 3206 lm, 3360 lm, 3390 lm
36W		3000 K, 3500 K, 4000 K, 5700 K, 6500 K	3360 lm, 3402 lm, 3444 lm, 3528 lm, 3612 lm
38W		3000 K, 3500 K, 4000 K, 5700 K, 6500 K	3528 lm, 3570 lm, 3612 lm, 3696 lm, 3780 lm
40W		3000 K, 3500 K, 4000 K, 5700 K, 6500 K	3612 lm, 3696 lm, 3780 lm, 3864 lm, 3948 lm

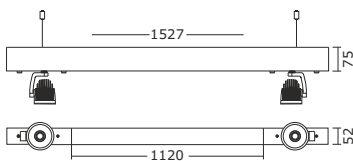

All dimensions are in mm

Color choice



Application area for retail space:

Ambient | Entrance | Cash Counter | Hyper/Supermarket