

**COMPACT LINEAR LIGHTING SYSTEMS**





**LUCINA-C-3PTC**  
Power track diffuser



**LUCINA-C-S**  
Surface Mount



**LUCINA-C-P**  
Pendant Mount

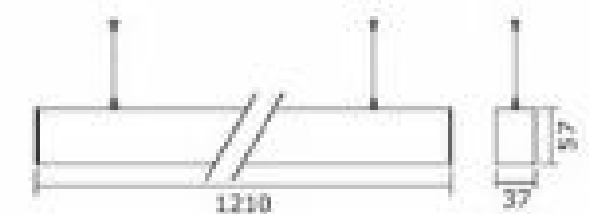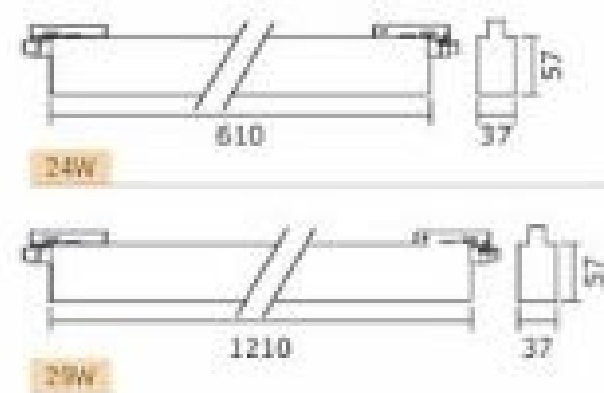

Color choice

Black
  Grey
  White

80 CRI
  IP20
  SMD

- Inbuilt-high efficiency electronic driver technology
- Adaptor-suitable for 3 wire & 4 wire power track

# LUCINA COMPACT



GARDLER®

PENDANT - DOWN LIGHT  
Wattage : 24W | 29W



Wide

Wattage : 24W | 29W

## PRODUCT HIGHLIGHTS

- Aesthetically designed surface & pendant mount linear profile luminaire for down light application
- Luminaire housing made from high-grade extruded aluminum
- High efficiency passive cooling technology for good thermal management
- Aesthetically designed high efficiency PC symmetric diffuser
- High efficacy SMD (mid power) LED technology used in FR-4 PCB
- Inbuilt-high efficiency electronic driver technology
- Shade : powder coated-white, black & grey

## TECHNICAL SPECIFICATIONS

- Light source : MPL-Mid Power LED
- Power consumption : 24W, 29W
- Color temperature : 3000 K | 3500 K | 4000 K | 5700 K | 6500 K
- Driver : Constant Current AC-DC
- Input voltage range : 220-240 V
- Output voltage : 33V-37V DC
- Output current : 650 mA, 750 mA
- Power factor : >0.95
- THD : <10%

**Product Application :**  
Retail Space | Ambient | Entrance  
Hyper / Supermarket

## LED KEY ASPECTS

WATTS	COLOR TEMP.	LUMEN
24W	3000 K, 3500 K, 4000 K, 5700 K, 6500 K	2116 lm, 2160 lm, 2246 lm, 2288 lm, 2418 lm
29W	3000 K, 3500 K, 4000 K, 5700 K, 6500 K	2673 lm, 2735 lm, 2851 lm, 2917 lm, 3029 lm

### Product Application :

Retail Space | Ambient | Entrance | Hyper / Supermarket

