

• Pendant mount - Down light



80 CRI

PRODUCT HIGHLIGHTS

- Aesthetically designed linear profile pendant, surface, luminaire for down light application
- Luminaire housing made from high-grade extruded aluminum
- High efficiency passive cooling technology for good thermal management
- Aesthetically designed high efficiency PC symmetric diffuser
- High efficacy SMD (mid powder) LED technology used in FR-4 PCB
- Inbuilt-high efficiency electronic driver technology
- Pendant installation with wire suspender and ceiling coupler
- Surface installation with clix fix SS clamp
- Shade : powder coated-white, black & grey


Available Colours



IP 20 Wide White Black Grey


TECHNICAL SPECIFICATIONS

Light Source	: MPL - Mid Power LED
Power Consumption	: 32W, 36W
Color Temperature	: 4000 K 5700 K
Lumens	32W : 2669 lm, 2779 lm 36W : 2936 lm, 2969 lm
Driver	: Constant current AC - DC
Input voltage range	: 220 - 240 V
Output voltage	: 33V - 37V DC
Output Current	: 800 mA 1000 mA
Power Factor	: >0.98
THD	: <10%

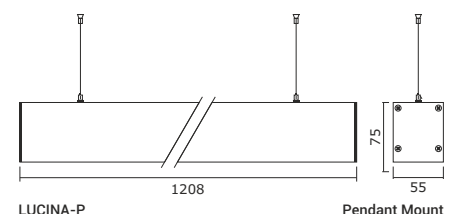

LUCINA-P

Pendant Mount

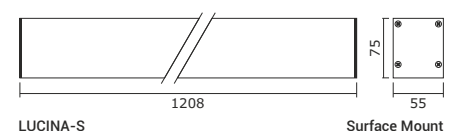

LUCINA-S

Surface Mount

All dimensions are in mm

Product Application :
Retail Space | Entrance | Hyper / Supermarket