


# LIZZY-R DOT 3W, 6W, 10W, 20W, 30W

GARDLER®

• Recess mount - Down light

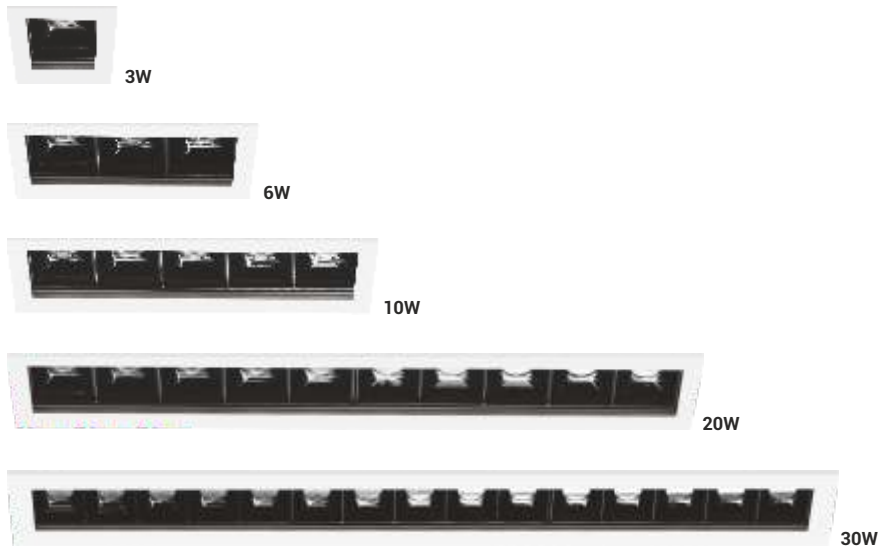

80 CRI


## PRODUCT HIGHLIGHTS

- Aesthetically designed linear compact recess luminaire for down light application
- Luminaire housing made from high-grade extruded aluminum
- High efficiency passive cooling technology for good thermal management
- Anti-glare reflector optics with option of beam angle -15°,28°,40°
- High efficacy SMD (High powder) LED integrated with highly efficient metal core PCB for higher thermal conductivity
- Isolated-high efficiency electronic driver technology with necessary electrical accessories
- Spring toggle for easy installation on false ceiling application
- Shade : powder coated-white, black



## TECHNICAL SPECIFICATIONS

Light Source	: COB - Chip on Board
Power Consumption	: 3w, 6w, 10w, 20w, 30W
Color Temperature	: 3000 K   4000 K
Lumen	3W : 140 lm, 155 lm
	6W : 405 lm, 414 lm
	10W : 745 lm, 758 lm
	20W : 1190 lm, 1202 lm
	30W : 2230 lm, 2241 lm
Driver	: Constant current AC - DC
Input voltage range	: 220 - 240 V
Output voltage	: 33V - 37V DC
Output Current	: 800 mA   900 mA   950 mA   1050 mA
Power Factor	: >0.98
THD	: <10%

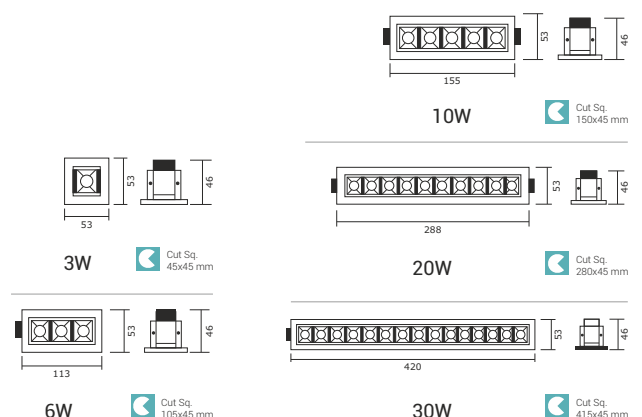

All dimensions are in mm

**Product Application :**  
Retail Space | General Area | Entrance | Trial Room